



Specification

| | |
|--|-------------------------------------|
| Throat Size | 1", 25.4mm |
| Nominal Impedance* | 8 ohms |
| Power Rating | 50W @ 2.5kHz |
| (EIA426B Secification, 1.6kHz @ 18dB) | |
| Resonance | 1.23kHz |
| Usable Frequency Range | 2.5kHz-20kHz |
| Recommended Crossover | 2.5kHz/18dB |
| Sensitivity | 104.3dB (1W/1m across 2.5kHz-20kHz) |
| Magnet Weight | 12 oz., 0.34kg |
| Voice Coil Diameter | 1.3", 33mm |
| Re | 6.7 |


Mounting Information

| | |
|-------------------------|--------------------|
| Overall Diameter | 3.5", 88.9mm |
| Mounting Holes Diameter | |
| Mounting Holes B.C.D. | |
| Mounting Thread | 1 3/8" 18 NEF ext. |
| Depth | 2.45", 62mm |
| Weight | 2 lbs, 0.9 kg |

Materials of Construction

| | |
|--------------------|------------------|
| Voice Coil Former | Aluminum |
| Diaphragm Material | Diamond Titanium |
| Magnet Composition | Ferrite |

ASD:1001 HF Drivers

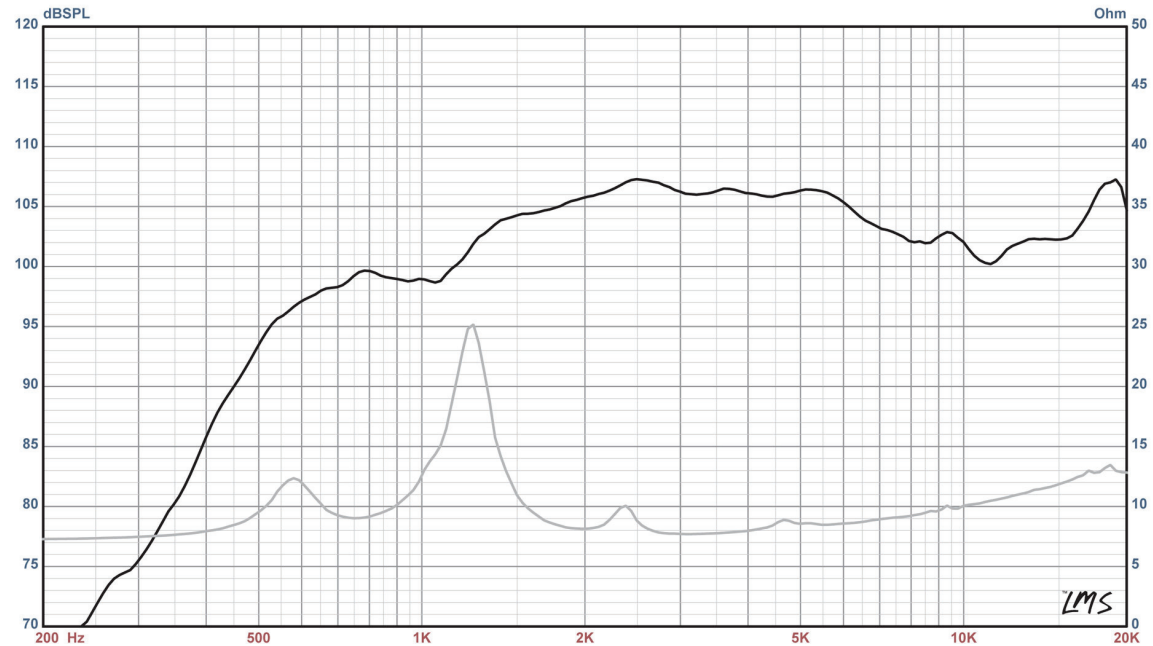

* Please inquire about alternative impedances.

A negative voltage at the red terminal causes a positive pressure at the output of the device.